


STROMVERSORGUNG (LINEAR) - MS075KE-512DL

Categories:


Outline Dimensions (mm(inch))

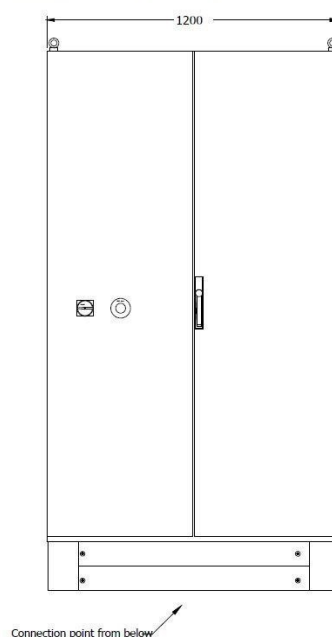

Connection point from below


BILDERGALERIE

Outline Dimensions (mm(inch))

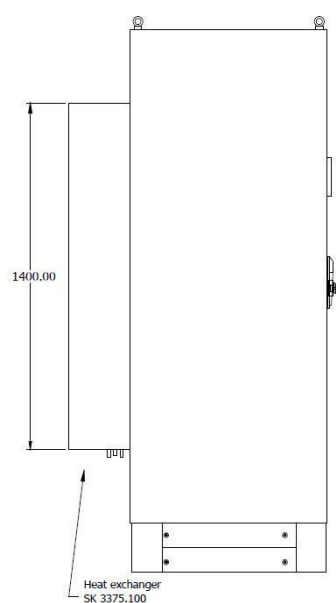

Heat exchanger
SK 3375.100

Outline Dimensions (mm(inch))

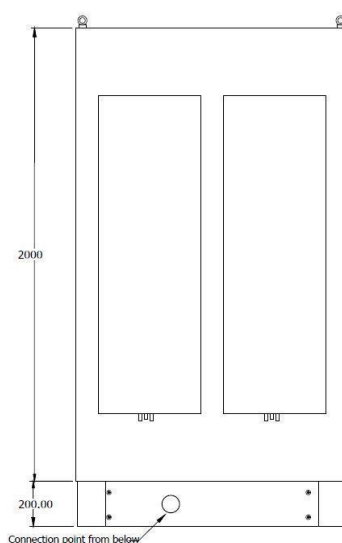

Connection point from below

ZUSÄTZLICHE INFORMATIONEN

Art	
Frequenz [MHz]	915
CW [W]	75000
	3~ (L1 / L2 / L3 / PE)
	–
[V]	400
[V]	–
[Hz]	50
	-
[W]	–
(HMI)	
	CAN-Bus
2	–
3	–
4	–
5	–
[mm ()]	1200 (47,24)
[mm ()]	2250 (88,58)
[mm ()]	1050 (41,84)
	IP40