


POWER-SUPPLY (LINEAR) - MS100KE-512DE

Category: Microwave generators




BILDERGALERIE


Outline Dimensions (mm(inch))

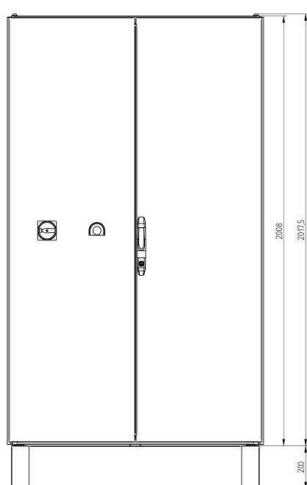

Outline Dimensions (mm(inch))

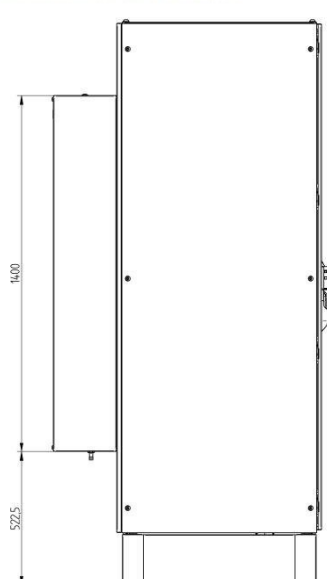

Outline Dimensions (mm(inch))

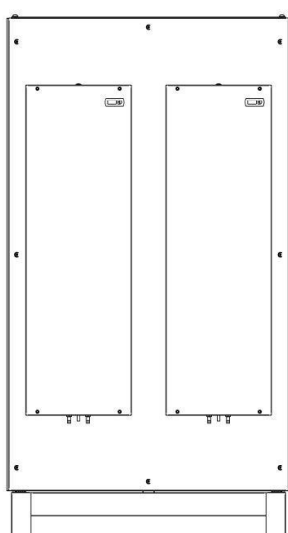

ADDITIONAL INFORMATION

Typ	Power-Supply
Frequency [MHz]	915
Output Power CW [W]	100000
Line connection	3~ (L1 / L2 / L3 / PE)
Control circuit connection [V]	–
Line Voltage [V]	400
Mains voltage control circuit [V]	–
Line Frequency [Hz]	50
Cooling	Air-water heat exchanger
Pulse output power max [W]	–
Front-Panel (HMI)	–
Interface	A/D
Interface 2	–
Interface 3	–
Interface 4	–
Interface 5	–
Width [mm (inch)]	1206 (47,48)
Height [mm (inch)]	2262 (89,06)
Depth [mm (inch)]	1108 (43,62)
Protection Class	IP40
Isolator	No
Power-Supply	Linear