


POWER-SUPPLY (SWITCH-MODE) - MX060KE-511KY

Categories: Microwave generators


Outline Dimensions (mm(inch))

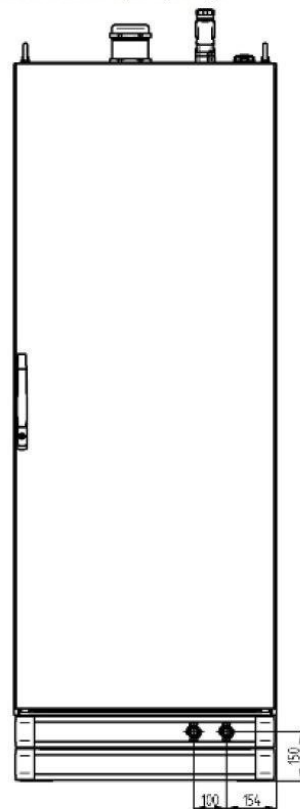


BESCHREIBUNG

BILDERGALERIE

Outline Dimensions (mm(inch))

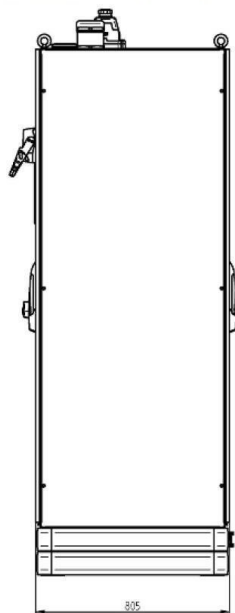

Outline Dimensions (mm(inch))

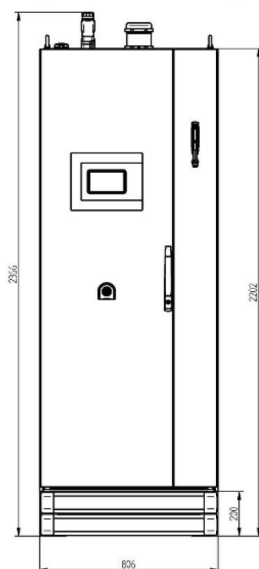

ADDITIONAL INFORMATION

Typ	Power-Supply
Frequency [MHz]	915
Output Power [W]	60000
Line connection	3~ (L1 / L2 / L3 / PE)
Control circuit connection [V]	–
Line Voltage [V]	480
Mains voltage control circuit [V]	–
Line Frequency [Hz]	50 / 60
Cooling	Air / Water
Pulse output power max [W]	–
Front-Panel (HMI)	Display
Interface	Control panel
Interface 2	A/D
Interface 3	Modbus TCP
Interface 4	–
Interface 5	–
Width [mm (inch)]	806 (31,73)
Height [mm (inch)]	2366 (93,15)
Depth [mm (inch)]	805 (31,69)
Protection	IP40
Isolator	No
Related Magnetron Head	MH060KS-510BU
Power-Supply	Switch-Mode