




# POWER-SUPPLY (SWITCH-MODE) - MX2000D-176KL

**Categories:** Microwave generators



## BESCHREIBUNG

## BILDERGALERIE

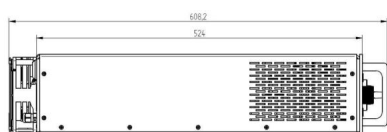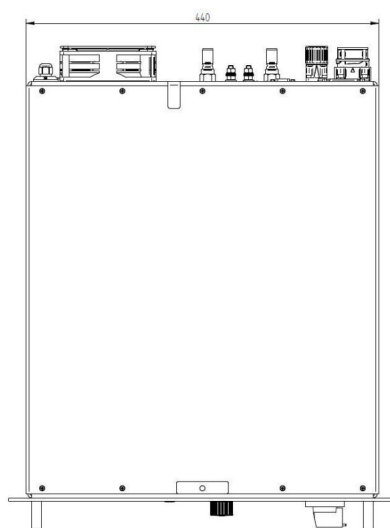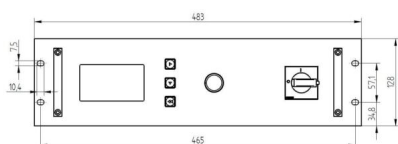

## ADDITIONAL INFORMATION

|                                          |                                             |
|------------------------------------------|---------------------------------------------|
| <b>Typ</b>                               | Power-Supply                                |
| <b>Frequency [MHz]</b>                   | 2450                                        |
| <b>Output Power [W]</b>                  | 2000                                        |
| <b>Line connection</b>                   | 3~ (L1 / L2 / L3 / PE)                      |
| <b>Control circuit connection [V]</b>    |                                             |
| <b>Line Voltage [V]</b>                  | 400                                         |
| <b>Mains voltage control circuit [V]</b> |                                             |
| <b>Line Frequency [Hz]</b>               | 50 / 60                                     |
| <b>Cooling</b>                           | Air / Water                                 |
| <b>Pulse output power max [W]</b>        | 2000                                        |
| <b>Front-Panel (HMI)</b>                 | Operating Unit with Main Switch             |
| <b>Interface</b>                         | front display                               |
| <b>Interface 2</b>                       | Can-Bus                                     |
| <b>Interface 3</b>                       | A/D                                         |
| <b>Interface 4</b>                       | –                                           |
| <b>Interface 5</b>                       | –                                           |
| <b>Width [mm (inch)]</b>                 | 484 (19,06)                                 |
| <b>Height [mm (inch)]</b>                | 128 (5,04)                                  |
| <b>Depth [mm (inch)]</b>                 | 607 (23,90)                                 |
| <b>Protection</b>                        | IP20                                        |
| <b>Isolator</b>                          | No                                          |
| <b>Related Magnetron Head</b>            | MH2000S-250BF, MH2000S-251BF, MH2000S-252BF |
| <b>Power-Supply</b>                      | Switch-Mode                                 |