



# MAGNETRON-HEAD - MH6000S-250BF

**Category:** Microwave generators

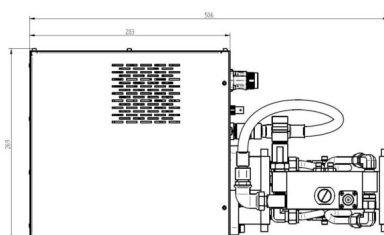

## BILDERGALERIE

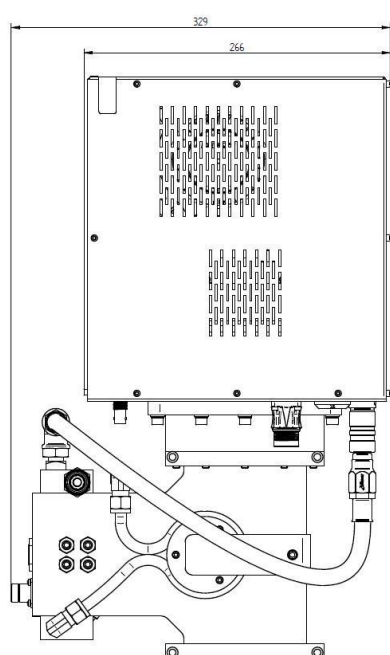

## ADDITIONAL INFORMATION

|                                          |                           |
|------------------------------------------|---------------------------|
| <b>Typ</b>                               | Magnetron Head            |
| <b>Frequency [MHz]</b>                   | 2450                      |
| <b>Output Power CW [W]</b>               | 6000                      |
| <b>Line connection</b>                   | 1 v 2 ~ (L / N v L2 / PE) |
| <b>Mains voltage control circuit [V]</b> | –                         |
| <b>Line Frequency [Hz]</b>               | –                         |
| <b>Cooling</b>                           | Air / Water, Air / Water  |
| <b>Pulse output power max [W]</b>        | 10000                     |
| <b>Front-Panel (HMI)</b>                 | With Connectors           |
| <b>Width [mm (inch)]</b>                 | 329 (12,95)               |
| <b>Height [mm (inch)]</b>                | 269 (10,59)               |
| <b>Depth [mm (inch)]</b>                 | 506 (19,92)               |
| <b>Protection Class</b>                  | IP20                      |
| <b>Output Connection Type</b>            | WR340 / R26               |
| <b>Output Connection</b>                 | Waveguide                 |
| <b>Isolator</b>                          | yes                       |