


# POWER-SUPPLY (LINEAR) - MS030KE-511DL


**Category:** Microwave generators

Outline Dimensions (mm(inch))

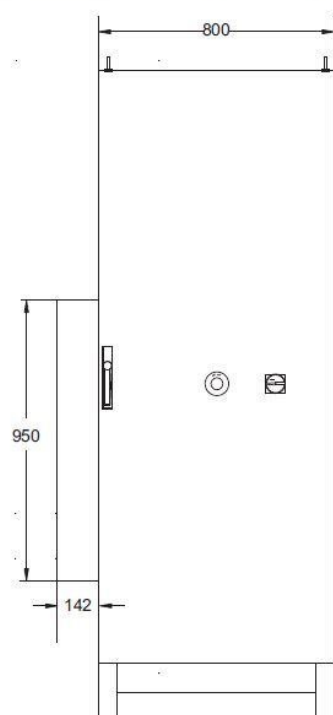

## BILDERGALERIE

Outline Dimensions (mm(inch))

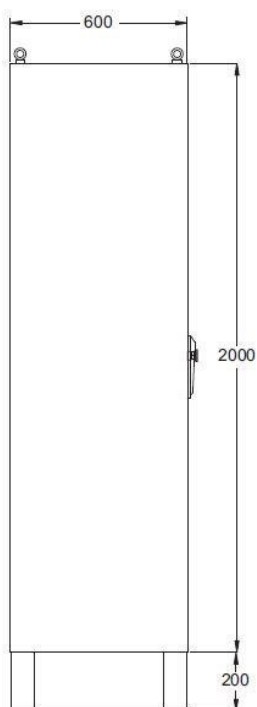

## ADDITIONAL INFORMATION

|                                          |                                |
|------------------------------------------|--------------------------------|
| <b>Typ</b>                               | Power-Supply                   |
| <b>Frequency [MHz]</b>                   | 915                            |
| <b>Output Power CW [W]</b>               | 30000                          |
| <b>Line connection</b>                   | 3~ (L1 / L2 / L3 / PE)         |
| <b>Control circuit connection [V]</b>    | –                              |
| <b>Line Voltage [V]</b>                  | 400                            |
| <b>Mains voltage control circuit [V]</b> | –                              |
| <b>Line Frequency [Hz]</b>               | 50                             |
| <b>Cooling</b>                           | Air-water heat exchanger       |
| <b>Pulse output power max [W]</b>        | –                              |
| <b>Front-Panel (HMI)</b>                 | No Front-Panel, No Front-Panel |
| <b>Interface</b>                         | Can-Bus                        |
| <b>Interface 2</b>                       | –                              |
| <b>Interface 3</b>                       | –                              |
| <b>Interface 4</b>                       | –                              |
| <b>Interface 5</b>                       | –                              |
| <b>Width [mm (inch)]</b>                 | 1056 (41,58)                   |
| <b>Height [mm (inch)]</b>                | 2261 (89,02)                   |
| <b>Depth [mm (inch)]</b>                 | 605 (23,82)                    |
| <b>Protection Class</b>                  | IP55                           |
| <b>Isolator</b>                          | No                             |
| <b>Power-Supply</b>                      | Linear                         |