


POWER SUPPLY (SWITCH-MODE) - MX3000D-171KN

Category: Microwave generators



GALLERY IMAGES

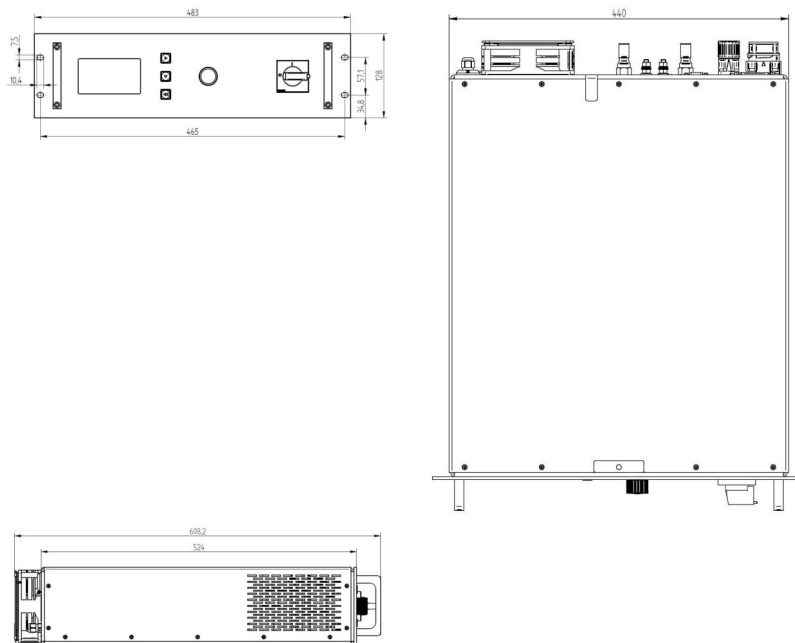

ADDITIONAL INFORMATION

Typ	Power-Supply
Frequency [MHz]	2450
Output Power CW [W]	3000
Line connection	3~ (L1 / L2 / L3 / PE)

Control circuit connection [V]	2~ (L1 / L2 / PE) / 1~ (L / N / PE)
Line Voltage [V]	400
Mains voltage control circuit [V]	208 / 230
Line Frequency [Hz]	50 / 60
Cooling	Air / Water
Pulse output power max [W]	6000
Front-Panel (HMI)	Operating Unit with Main Switch
Interface	front display
Interface 2	Can-Bus
Interface 3	A/D
Interface 4	RS-485
Interface 5	–
Width [mm (inch)]	484 (19,06)
Height [mm (inch)]	128 (5,04)
Depth [mm (inch)]	607 (23,90)
Protection Class	IP20
Isolator	No
Related Magnetron Head	MH3000S-250BF, MH3000S-251BF, MH3000S-252BF
Power-Supply	Switch-Mode