




# POWER-SUPPLY (SWITCH-MODE) - MX6000D-154KM

**Category:** Microwave generators



## BESCHREIBUNG

## BILDERGALERIE

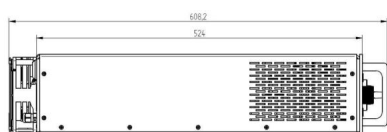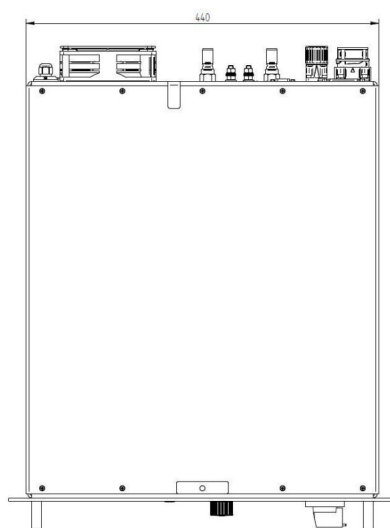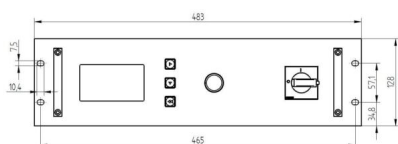

## ADDITIONAL INFORMATION

|                                          |                                                                  |
|------------------------------------------|------------------------------------------------------------------|
| <b>Typ</b>                               | Power-Supply                                                     |
| <b>Frequency [MHz]</b>                   | 2450                                                             |
| <b>Output Power CW [W]</b>               | 6000                                                             |
| <b>Line connection</b>                   | 3~ (L1 / L2 / L3 / PE)                                           |
| <b>Control circuit connection [V]</b>    |                                                                  |
| <b>Line Voltage [V]</b>                  | 400                                                              |
| <b>Mains voltage control circuit [V]</b> |                                                                  |
| <b>Line Frequency [Hz]</b>               | 50 / 60                                                          |
| <b>Cooling</b>                           | Air / Water, Air / Water                                         |
| <b>Pulse output power max [W]</b>        | –                                                                |
| <b>Front-Panel (HMI)</b>                 | Operating Unit with Main Switch, Operating Unit with Main Switch |
| <b>Interface</b>                         | front display                                                    |
| <b>Interface 2</b>                       | Can-Bus                                                          |
| <b>Interface 3</b>                       | A/D                                                              |
| <b>Interface 4</b>                       |                                                                  |
| <b>Interface 5</b>                       | –                                                                |
| <b>Width [mm (inch)]</b>                 | 484 (19,06)                                                      |
| <b>Height [mm (inch)]</b>                | 128 (5,04)                                                       |
| <b>Depth [mm (inch)]</b>                 | 607 (23,90)                                                      |
| <b>Protection Class</b>                  | IP20                                                             |
| <b>Isolator</b>                          | No                                                               |
| <b>Related Magnetron Head</b>            | MH6000S-250BF, MH6000S-251BF                                     |
| <b>Power-Supply</b>                      | Switch-Mode                                                      |